


LOPEZ LED DOWNLIGHT

FEATURES


- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Internal Driver
- 3 Year Warranty




Luminous Intensity Distribution Diagrams

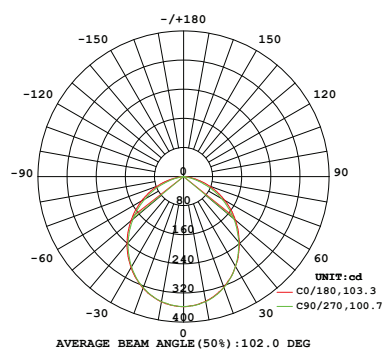

LOPEZ (3000K)

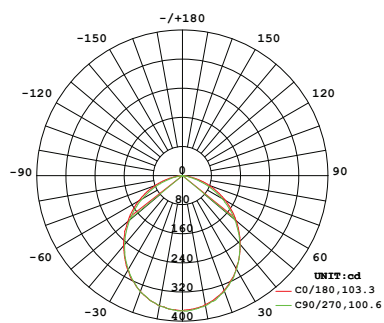

LOPEZ (4000K)

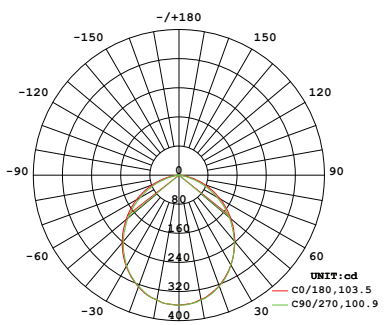

LOPEZ (5700K)

LOPEZ

Fitting Colour	White
Efficacy	110-115Lm/W
Lumen Output	860-920lm
Power	8W
IP Rating	IP54 (Front Only)
UGR	<29
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	PC
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
IC-F/ IC-4 Tested	Yes
Beam Angle	100°
Approvals & Certificates	AS/NZS 60598.2.2 & 60598.1
LED Lifetime	>40,000hrs


FITTING DIMENSIONS

Diameter	Ø110mm
Depth	47mm
Cut-Out	Ø90mm


LOPEZB LED DOWNLIGHT

FEATURES


- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Internal Driver
- 3 Year Warranty

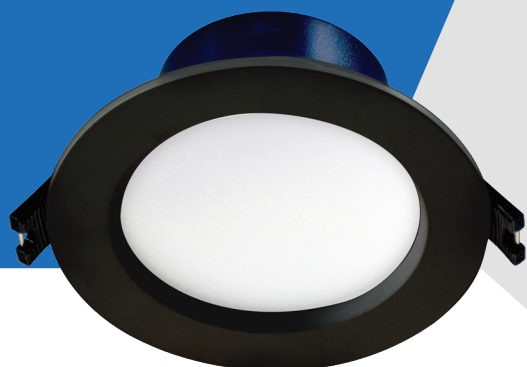


Luminous Intensity Distribution Diagrams

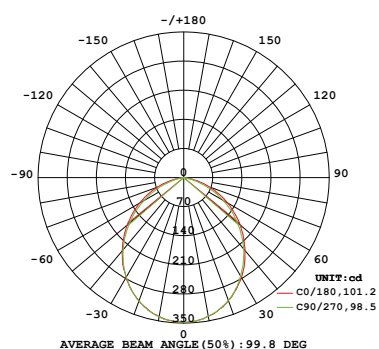

LOPEZB (3000K)

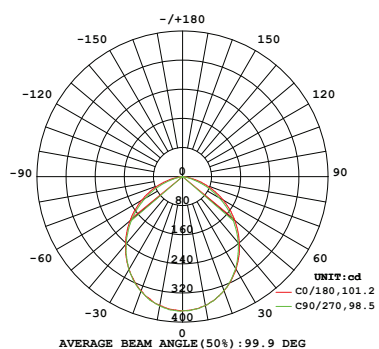

LOPEZB (4000K)

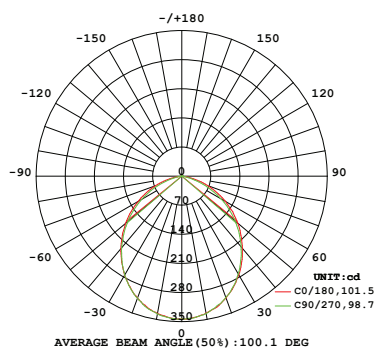

LOPEZB (5700K)

LOPEZB

Fitting Colour	Black
Efficacy	110-115Lm/W
Lumen Output	860-920lm
Power	8W
IP Rating	IP54 (Front Only)
UGR	<29
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	PC
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
IC-F/ IC-4 Tested	Yes
Beam Angle	100°
Approvals & Certificates	AS/NZS 60598.2.2 & 60598.1
LED Lifetime	>40,000hrs

FITTING DIMENSIONS

Diameter	Ø110mm
Depth	47mm
Cut-Out	Ø90mm


LOPEZF LED DOWNLIGHT

FEATURES


- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Internal Driver
- 0.5m Flex & Plug
- 3 Year Warranty




Luminous Intensity Distribution Diagrams

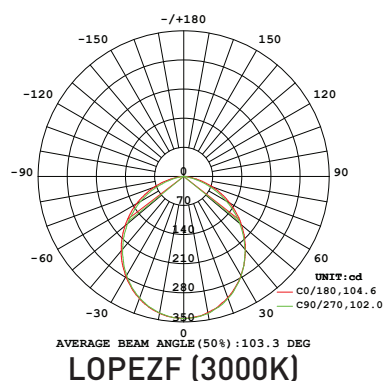

LOPEZF (3000K)

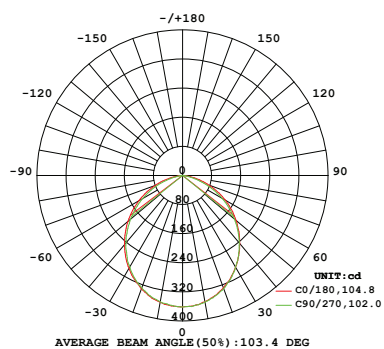

LOPEZF (4000K)

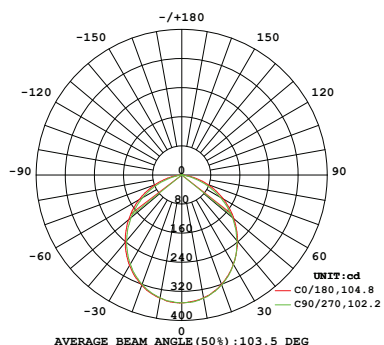

LOPEZF (5700K)

LOPEZF

Fitting Colour	White
Efficacy	110-115Lm/W
Lumen Output	860-920lm
Power	8W
IP Rating	IP54 (Front Only)
UGR	<29
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	PC
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
IC-F/ IC-4 Tested	Yes
Beam Angle	100°
Approvals & Certificates	AS/NZS 60598.2.2 & 60598.1
LED Lifetime	>40,000hrs
Includes	0.5m Flex & Plug

FITTING DIMENSIONS

Diameter	Ø110mm
Depth	47mm
Cut-Out	Ø90mm